



# **ALL - IN - ONE 4K AI Video Bar Kit**

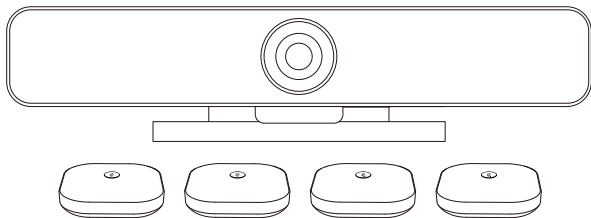

**User Manual**


# What's in the box




4K Ai Video Bar X 1



Camera Remote Control X 1



5M Camera USB cable X 1




AC Adapter X 1



Wireless extension  
microphone charging pile X 1



Wireless extension  
microphone X 4




1.5M Charging pile USB cable X 1




User Manual X 1

# Overview

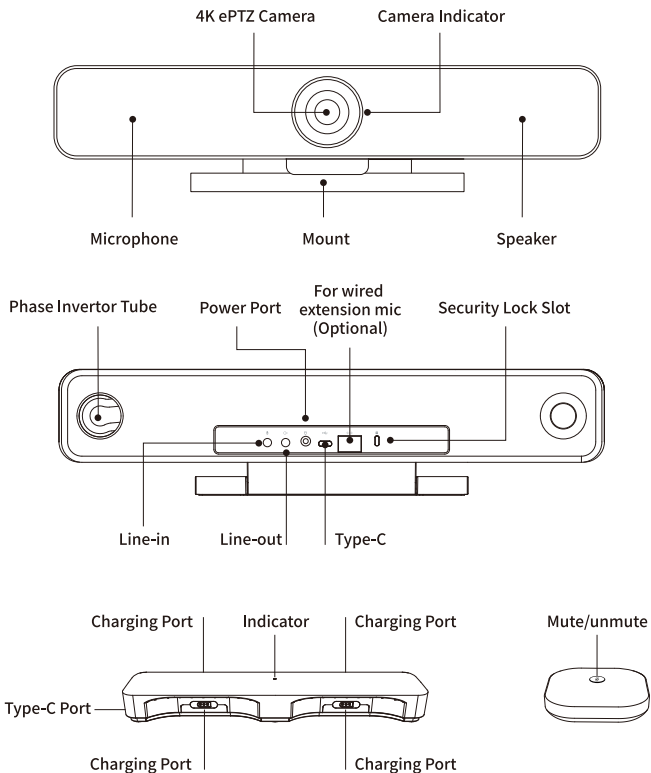


## Easy Set-Up

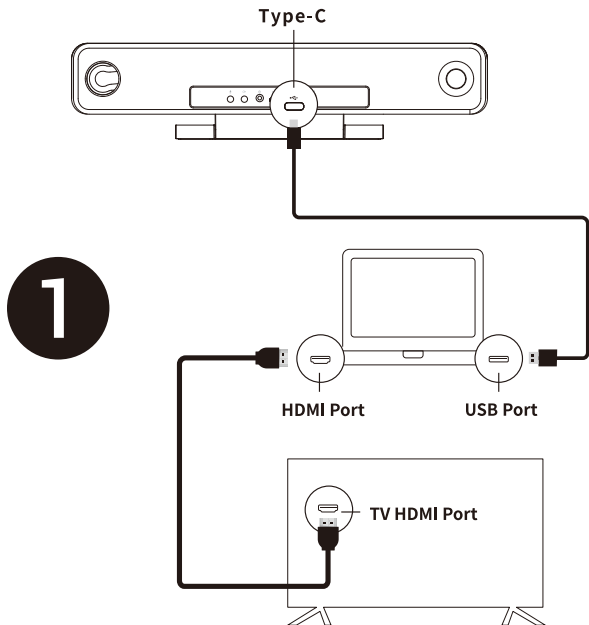


Connect the Video Bar to PC/conference host via USB cable.  
and connect the PC/conference host to TV via HDMI cable.


2

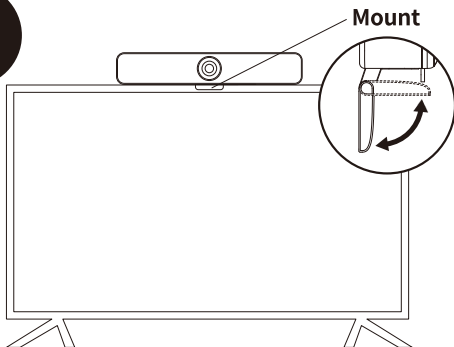

3

Connect the power supply.

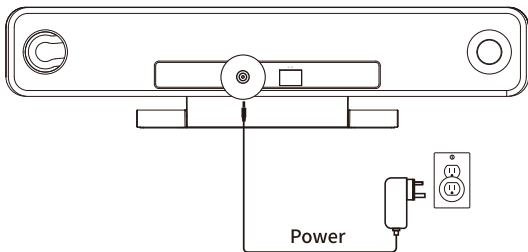

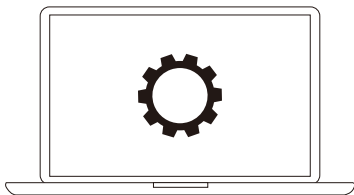

In computer/conference software settings, choose the source of camera, microphone and speaker from the usb video bar.


## **Camera indicator light status**

The camera indicator light will turn blue when camera program is running, It will turn red when microphone is muted.  
For other normal conditions, the light will be white.

## **Camera preset settings**

Adjust the camera view to the position you want to preset, then long press 1 (or 2, 3) button for 2 seconds. After a hint tone, camera preset 1 is set successfully. Repeat the above steps, press 1, 2, 3 keys respectively, you can set 3 preset positions in total. Repeating the same key will overwrite the previous preset and update it to the latest preset.

# Camera Remote Control

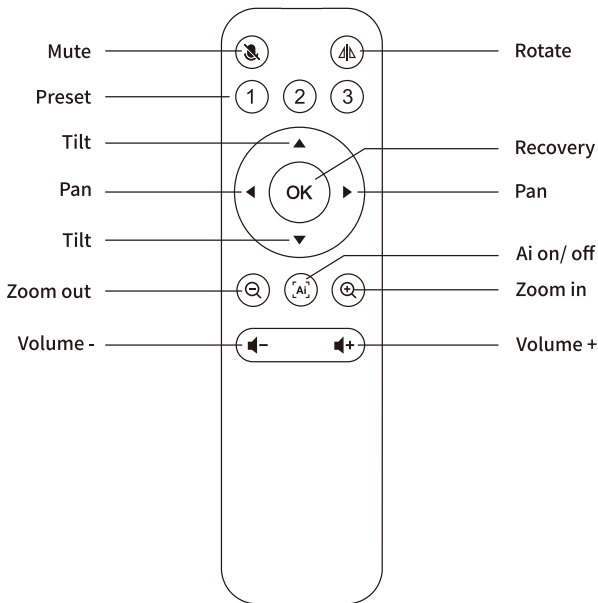

# About Wireless microphone

## 1. Power On/off

- Press and hold the extension microphone button for 2 seconds to power on/power off.
- When the extension microphone is not connected with host, it will automatically shut down after 5 minutes.
- When connected, the extension microphones will be shut down at same time while host is shutting down.

## 2. Extension microphone pairing

- After turn on extension microphones and power connected with video bar, press extension microphones mute buttons and hold for about 6 seconds to enter pairing mode. The extension microphone led will be white flashing light. Then press the remote control buttons ( ◀+, ▶+, ▶ ) in sequence. The video bar led will be green circle light and enter into pairing mode . After both lights stop flashing and always on, then extension microphones are paired with video bar successfully. This operation is only needed at the first time, or after a new firmware upgrade.

## 3. Extension microphone charge

Connect extension mic to the charger, the extension mic starts charging. During charging, extension microphone won't be working though connected with host.


- Low battery: orange light flashes
- Charging: orange light on
- Fully charged: green light on

### Notice:

When not paired, connect to the charger and remove the extension microphone: the white light flashes instantly.

When paired: Connect to the charger and remove the extension microphone: Synchronize the host light.



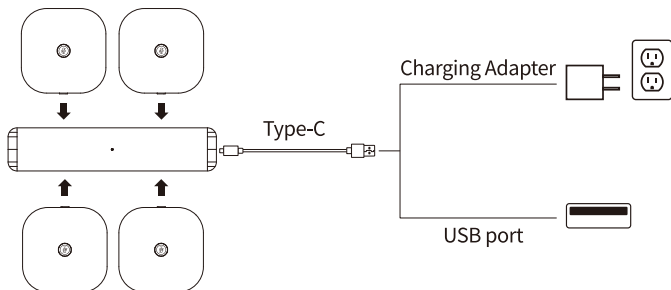

(Charging diagram)

#### 4. Extension mic /Wired mic /Built-in mic

When the host is connected with extension mic /wired mic /built-in mic at the same time, the priority is wired mic, then extension mic, then built-in mic.